GUANGDONG ZHONGLIAN ALUMINIUM PROFILES CO., LTD

Address: Guohong Road, 2nd Industrial Park, Changhongling, Dali Town, Nanhai District, Foshan City, Guangdong. China.

Tel: +86(757) 8179 2001 Fax: +86(757) 8179 2002

Attn: Josephine Cell: +86 139 25948161

Email: zhonglian93@163.com Website: http://zhl-alu.com

Business Type:	Manufacturer
Main Products:	aluminium profiles, windows and doors aluminium profiles, curtain wall aluminium profiles, furniture aluminium profiles, industrial aluminium profiles
Year Established:	1993
Number of Employees:	1000 People
Total Revenue:	Above US\$100 Million
Certifications:	ISO9001-2008



Main Gate



Extrusion production line







Extrusion machine

Workshop

Warehouse









International Standard (ASC) Anodized Silver Color

100% new material and 99% pure AL.

Anodized thickness of firm:13-15um.

No any machining line and spot.

Guaratee 15 years using in door.



100% new material and 99% pure AL.

Thickness of firm:around 80-120um.

OEM color available. No machining line and spot. Easy to keep clean.

Guaratee 10 years using at least.

Woodgrain


100% new material and 99% pure AL.

Thickness of firm: around 80-120um.

Common woodgrain pattern or customized pattern available.

No machining line and spot. Easy to keep clean.

Guaratee 10 years using at least.

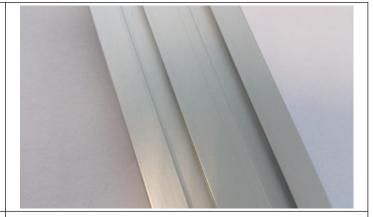







Packing Details

Inside Packing: packed with the plastic protective film or customized.



Outside Packing: packed with the waterproof kraft paper



Terms of Payment	The buyers shall pay 30% as deposit by T/T,the balance shall be paid off before shipment.
Lead time	Moulds developing and samples test: 12-15days.
	Production completed: 20-25 days make delivery after receiving deposit.
Weight by	Price is calculated based on the final actual weight and quantity. A 1-2% tolerance for both the weight and quantity is allowed. The weight will be subjected to the national scale.
Inspection Standard	Before paying off the balance, clients are welcomed to come to our factory to test the goods, there shall be no scratches, no deformation and no bruises on the surface with an evenly coloring surface treatment subjected to the sample.